

FULL ELECTRIC PUSH TRUCK

KLT series

Load capacity:2000/2500/3000kg



Standard features



Control tiller



Waterproof



EPS system



Platform



Curtis controller



Waterproof key



Shock absorbing
Steering wheel

Option features





Lithium battery



Guard rail

Technical Specifications (before modification to remove the forks and the lifting features)

Model		KLT20	KLT25	KLT30
Load capacity	kg	2000	2500	3000
Load center	mm	600		
Max lifting height	mm	125		
Travel speed (unladen/laden)	km/h	5.6/5.5		
Lifting speed (unladen/laden)	mm/s	50/30		
Lowered speed (unladen/laden)	mm/s	57/57		
Max gradability (laden/unladen)	%	6/12		
Weight with battery	kg	685	687	690
Overall length	mm	1775		
Overall width	mm	735		
wheelbase	mm	1417		
Fork length	mm	1150		
Width overall forks	mm	550/685		
Fork thickness	mm	55		
Fork lowered height	mm	85		
Minimum aisle width with 1200x1000 pallet	mm	2312		
Load wheel	mm	85*70		
Drive wheel	mm	230*75		
Caster wheel	mm	130*55		
Wheel type		PU		
Drive motor	kw	1.5 (AC)		
Lift motor	kw	0.8		
Battery Volt	V	24		
Battery capacity	Ah	210		
Battery weight	kg	195		

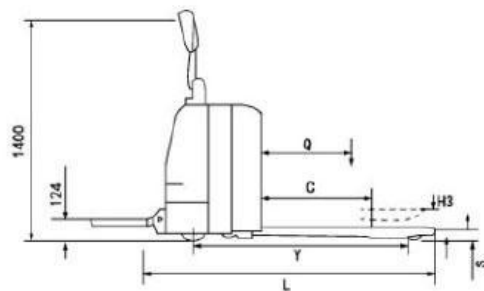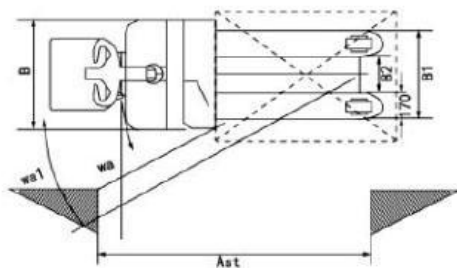

Additional Equipment/Trolley can be welded/mounted to the parts marked in red

