
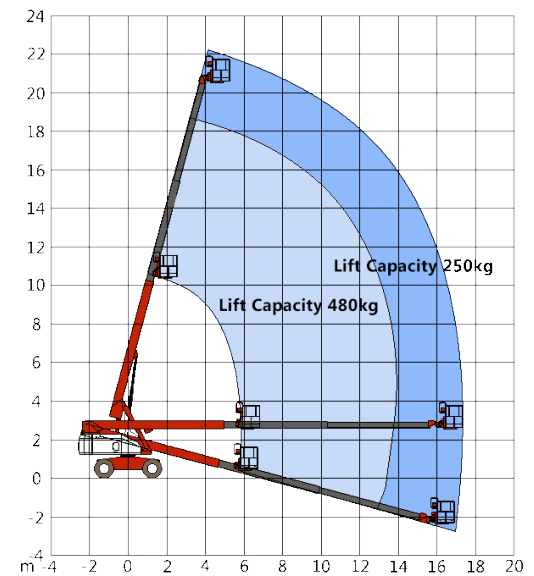
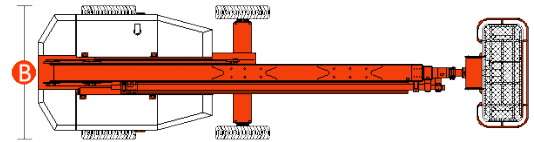


Models	GTBZ20			
<b>Dimensions</b>	<b>Metric</b>	<b>US</b>		
Platform height max.	20.6 m	68 ft		
Working height max.*	22.6 m	74 ft		
Horizontal reach max.	17.5 m	57 ft 4 in		
<b>A</b> Length - stowed	9.57 m	31 ft 4 in		
<b>B</b> Width - stowed	2.49 m	8 ft 2 in		
<b>C</b> Height - stowed	2.84 m	9 ft 3 in		
<b>D</b> Wheelbase	2.49 m	8 ft 2 in		
Ground clearance	0.45 m	1 ft 5 in		
Platform size(L*W*H)	1.45 m* 0.85 m* 1.24 m	4 ft 8 in* 2 ft 8 in* 4 ft 1 in		
<b>Productivity</b>				
Max. platform occupancy	2	2		
Lift capacity	250 kg (Unlimited)	551 lbs (Unlimited)		
	480 kg (Limited)	1058 lbs (Limited)		
Turntable rotation	360° continuous	360° continuous		
Platform rotation	160°	160°		
Drive speed - stowed	0~6.3 km/h	0~3.9 mph		
Drive speed - raised	0~1.1 km/h	0~0.7 mph		
Gradeability**	30% (2WD) 45% (4WD)	30% (2WD) 45% (4WD)		
Turning radius - inside	1.66 m	5 ft 4 in		
Turning radius - outside	4.97 m	16 ft 3 in		
Turntable tailswing	1.42 m	4 ft 7 in		
Max. allowable slope	3°	3°		
Max. noise on normal use	82 dB(A)	82 dB(A)		
Drive & steer model	2WD*2WS / 4WD*2WS	2WD*2WS / 4WD*2WS		
Tire size / type	9.00 – 20 / 7.0 solid	9.00 – 20 / 7.0 solid		
<b>Power</b>				
Power Source	Original	Cummins/Perkins	Original	Cummins/Perkins
	Engine		Engine	
Fuel tank capacity	160 L	42.27 gal		
Control voltage	12 VDC	12 VDC		
Power	45 KW	45 KW		
<b>Weight***</b>				
Overall weight	11815 kg (2WD) /	26048 lbs (2WD) /		
	11885 kg (4WD)	26202 lbs (4WD)		
<b>Standards Compliance</b>	CE/ ISO/ ADR/ ARAMCO	CE/ ISO/ ADR/ ARAMCO		

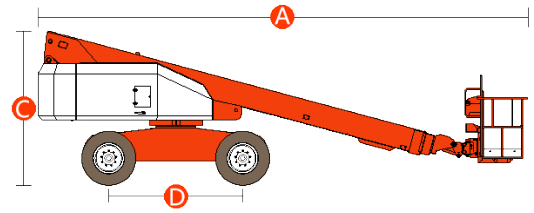

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* Gradeability applies to driving on slopes.

\*\*\* Weight will vary depending on options and/or country standards.