
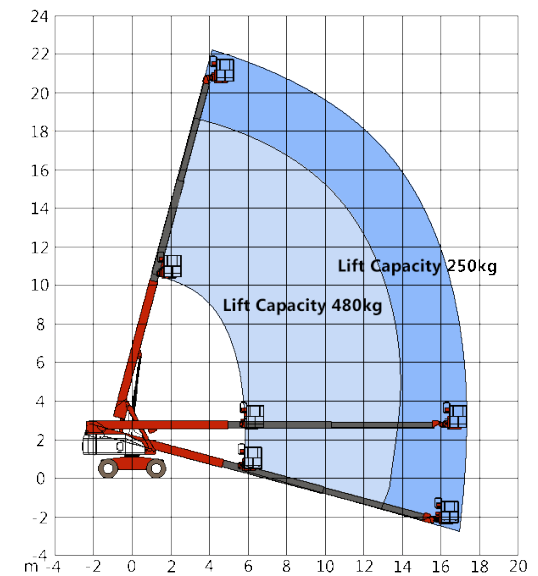
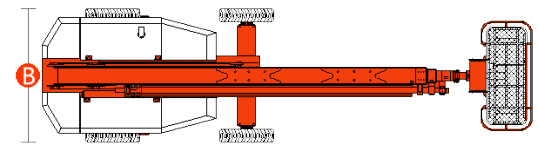


Models	GTBZ20	
Dimensions	Metric	US
Platform height max.	20.6 m	68 ft
Working height max.*	22.6 m	74 ft
Horizontal reach max.	17.5 m	57 ft 4 in
A Length - stowed	9.57 m	31 ft 4 in
B Width - stowed	2.49 m	8 ft 2 in
C Height - stowed	2.84 m	9 ft 3 in
D Wheelbase	2.49 m	8 ft 2 in
Ground clearance	0.45 m	1 ft 5 in
Platform size(L*W*H)	1.45 m* 0.85 m* 1.24 m	4 ft 8 in* 2 ft 8 in* 4 ft 1 in
Productivity		
Max. platform occupancy	2	2
Lift capacity	250 kg (Unlimited) 480 kg (Limited)	551 lbs (Unlimited) 1058 lbs (Limited)
Turntable rotation	360° continuous	360° continuous
Platform rotation	160°	160°
Drive speed - stowed	0~6.3 km/h	0~3.9 mph
Drive speed - raised	0~1.1 km/h	0~0.7 mph
Gradeability**	30% (2WD) 45% (4WD)	30% (2WD) 45% (4WD)
Turning radius - inside	1.66 m	5 ft 4 in
Turning radius - outside	4.97 m	16 ft 3 in
Turntable tailswing	1.42 m	4 ft 7 in
Max. allowable slope	3°	3°
Max. noise on normal use	82 dB(A)	82 dB(A)
Drive & steer model	2WD*2WS / 4WD*2WS	2WD*2WS / 4WD*2WS
Tire size / type	9.00 – 20 / 7.0 solid	9.00 – 20 / 7.0 solid
Power		
Power Source	Original Cummins/Perkins Engine	Original Cummins/Perkins Engine
Fuel tank capacity	160 L	42.27 gal
Control voltage	12 VDC	12 VDC
Power	45 KW	45 KW
Weight***		
Overall weight	11815 kg (2WD) / 11885 kg (4WD)	26048 lbs (2WD) / 26202 lbs (4WD)
Standards Compliance	CE/ ISO/ ADR/ ARAMCO	CE/ ISO/ ADR/ ARAMCO

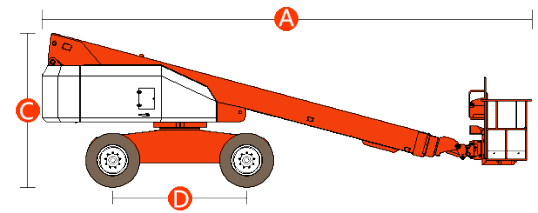

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes.

*** Weight will vary depending on options and/or country standards.

