
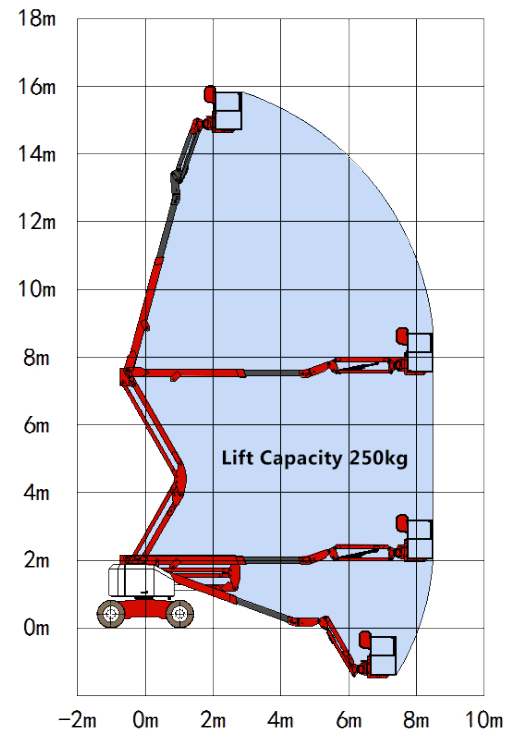
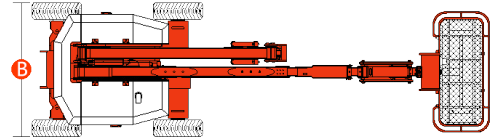


Models	GTZZ15J	
Dimensions	Metric	US
Platform height max.	15 m	49 ft
Working height max.*	17 m	55 ft
Horizontal reach max.	8.5 m	27 ft 9 in
Up and over clearance max.	7.4 m	24 ft 3 in
<b>A</b> Length - stowed	7.68 m	25 ft 2 in
<b>B</b> Width - stowed	2.26 m	7 ft 4 in
<b>C</b> Height - stowed	2.16 m	7 ft 1 in
<b>D</b> Wheelbase	2.03 m	6 ft 7 in
Ground clearance	0.32 m	1 ft
Platform size(L*W*H)	1.45 m* 0.85 m* 1.24 m	4 ft 8 in* 2 ft 8 in* 4 ft 1 in
<b>Productivity</b>		
Max. platform occupancy	2	2
Lift capacity	250 kg	551 lbs
Turntable rotation	355°	355°
Platform rotation	160°	160°
Drive speed - stowed	0~7 km/h	0~4.3 mph
Drive speed - raised	0~1.1 km/h	0~0.7 mph
Gradeability**	30% (2WD) 40% (4WD)	30% (2WD) 40% (4WD)
Turning radius - inside	1.8 m	5 ft 9 in
Turning radius - outside	4.5 m	14 ft 8 in
Turntable tailswing	0 m	0 ft
Max. allowable slope	3°	3°
Drive & steer model	2 WD*2 WS / 4WD*2WS	2 WD*2 WS / 4WD*2WS
Tire Size / Type	33*12 – 20 / solid	33*12 – 20 / solid
<b>Power</b>		
Power Source	Perkins Engine	Perkins Engine
Driving type	Hydraulic	Hydraulic
Fuel tank capacity	70 L	18.49 gal
Control voltage	12 VDC	12 VDC
Power	37.3 KW	37.3 KW
<b>Weight***</b>		
Overall weight	6850 kg (2WD) / 7050 kg (4WD)	15102 lbs (2WD) / 15543 lbs (4WD)
<b>Standards Compliance</b>	CE/ ISO/ ADR/ ARAMCO	CE/ ISO/ ADR/ ARAMCO

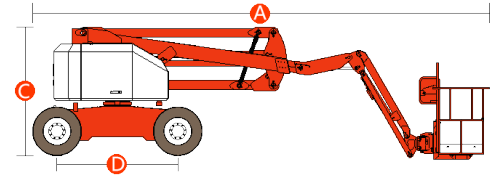

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

\*\* Gradeability applies to driving on slopes.

\*\*\* Weight will vary depending on options and/or country standards.